

Rückflussverhinderer Typ 407

DN40 - DN200


Technische Daten

Schliess-System:	M
Betriebsdruck:	Max. 16/10 bar
Anschluss:	Flansche PN10
Medien:	Neutrale, saubere, flüssige und Luft
Mediumstemperatur:	-10°C / +60°C
Einbaulage:	beliebig




Abmessungen [mm]

Typ	DN	L	D	P _{max} [bar]	Kv [m³/h]	Art.-No.
407 40	40	148	140	16	40.3	2164
407 50	50	158	159	16	70.5	2165
407 65	65	176	169	16	93.3	2166
407 80	80	196	212	16	180	2167
407 100	100	213	234	16	305.5	2168
407 125	125	228	250	16	515	2169
407 150	150	266	324	16	1072	2170
407 200	200	439	426	10	1940	2237



Werkstoffe

1	Gehäuse	GG25, epoxy
2	Kuppel:	DN40-65: Edelstahl DN80-200: Messing
3	Membrane:	NR Optional KFM (0°C / +100°C)
4	O-Ring:	EPDM
5	Sitz (Lochblech):	Edelstahl
6	Mutter:	Stahl verzinkt
7	Schraube:	Edelstahl 304
8	Schraube:	Edelstahl 304

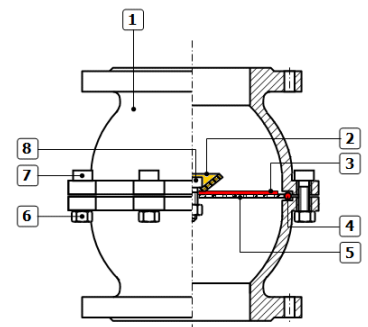

Durchflussdiagramm

