

## Tuyau d'acier inox flexible

### Type GSE


#### Données techniques

<b>Technique:</b>	Tuyaux ondulés
<b>Pression de service:</b>	Max. 4 bar
<b>Raccordement:</b>	Amont: Taraudé femelle Rp 1/2" Aval: Écrou raccord Rp 1/2"
<b>Tuyaux ondulés:</b>	Inox
<b>Raccords:</b>	Laiton
<b>Joint plat:</b>	Cork-Caoutchouc (DVGW-G) *
<b>Fluides:</b>	Gaz des familles 1,2,3
<b>Temp. ambiante.:</b>	Max. +65°C
<b>Agrément:</b>	SSIGE



#### Encombrements (mm)

Art.-No.	Rp	L
319 160103HST	1/2"	350
319 160105HST	1/2"	500
319 160107HST	1/2"	750
319 160110HST	1/2"	1000
319 160112HST	1/2"	1250
319 160115HST	1/2"	1500

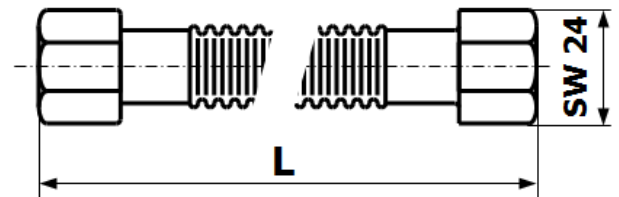

\*

Le joint plat pour l'écrou-raccord est inclus dans le volume de livraison.