


Crépine

Typ 46 / 46G

DN50-DN400

Données techniques

Raccordement:	A brides PN10/16
Perforation:	Voir Encombrement [MW]
Corps:	GG25
Crépine:	46 = PA / 46G = Acier galvanisé
Fluide:	Neutres, propres liquides
Temp. de fluide.:	Max. +60°C
Position de mont.:	Toutes

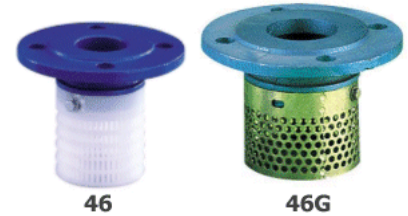

Encombrement (mm)

Type	DN	D	d	H	MW	Art.-No
46 / 46G	50	165	101 / 97	127 / 100	Ø6	2139
46 / 46G	65	185	120 / 117	149 / 120	Ø6	2140
46 / 46G	80	200	143 / 139	179 / 140	Ø8	2141
46 / 46G	100	220	174 / 169	215 / 167	Ø8	2142
46	125	250	225	217	Ø8	2821
46	150	285	265	250	Ø8	2822
46	200	340	366	326	Ø10	2824
46	250	295	436	366	Ø10	2825
46	300	445	506	414	Ø10	2826
46	350	505	636	444	Ø12	2827
46	400	565	696	464	Ø12	2828

