

Clapets de non-retour Typ 882


DN65 – DN200

Données techniques

Schliesssystem:	02
Pression de service:	P_{max} [bar] siehe Tabelle Abmessungen [mm]
Raccordement:	Entre brides
Fluide:	Liquides, neutres, propres
Temp. de fluide:	-10°C / +100 °C
Position de mont.:	Toutes.

Encombrement

Art.-No.	DN	L	D	P _{max} [bar]	Kv [m3/h]
2281	65	75	126	40	136
2227	80	85	142	40	200
2229	100	105	170	40	265
2230	125	90	194	40	265
2231	150	106	222	40	347
2232	200	140	273	16	550



Système de fermeture 02
Image symbolique

Conformité CE directive 2014/68/EU
Perçage bride suivant EN 1092-2



Matériaux

Composant	882	
1 Corps:	GGG40, epoxy	
2 Bague:	Bronze	
3 Guide:	GG25, epoxy	
4 Ressort:	Inox	
5 Joint:	EPDM	
6 Obturateur:	DN65 DN80-DN200	Bronze GG25, epoxy
7 Axe:	Bronze	

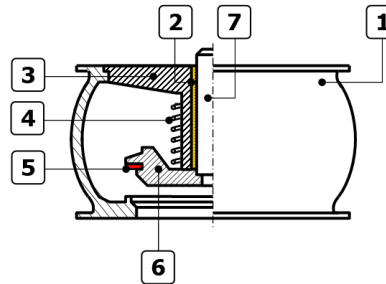


Diagramme de débit

